

Flocking Modules

Richie Burke

October 14, 2016

Motivation

The analysis and modelling of flocks/swarms has found wide application in areas such as

Motivation


The analysis and modelling of flocks/swarms has found wide application in areas such as

- biology/ecology
- civil engineering/crowd control
- fisheries
- robotics/unmanned aerial vehicles

Motivation

The analysis and modelling of flocks/swarms has found wide application in areas such as


- biology/ecology
- civil engineering/crowd control
- fisheries
- robotics/unmanned aerial vehicles

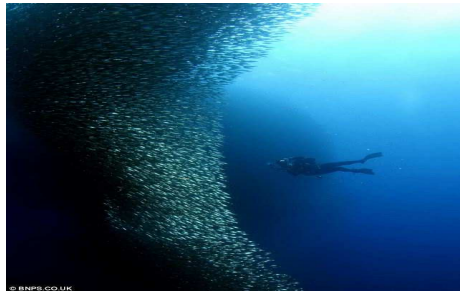

Motivation

The analysis and modelling of flocks/swarms has found wide application in areas such as

- biology/ecology
- civil engineering/crowd control
- fisheries
- robotics/unmanned aerial vehicles

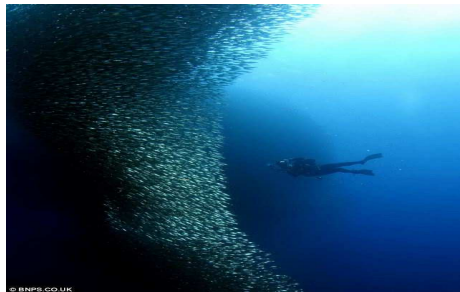

We shall investigate swarming models from the perspective of hybrid multi-agent control/consensus.

Consensus

Broadly speaking, *consensus* occurs when the many agents adjust their positions/velocities in relation to one another and reach some “agreement” such as a formation in space.

Consensus

Broadly speaking, *consensus* occurs when the many agents adjust their positions/velocities in relation to one another and reach some “agreement” such as a formation in space.

A consensus is achieved when, for example, the agents move in unison and a swarm is created and maintained.

Consensus

Broadly speaking, *consensus* occurs when the many agents adjust their positions/velocities in relation to one another and reach some “agreement” such as a formation in space.
A consensus is achieved when, for example, the agents move in unison and a swarm is created and maintained.



Flocking models

The modelling of flocks has been an active area of applied mathematics for the past twenty years. Numerous mathematical models have been developed to simulate the complex choreography of flocking animals.

Flocking models

The modelling of flocks has been an active area of applied mathematics for the past twenty years. Numerous mathematical models have been developed to simulate the complex choreography of flocking animals.

Various metrics have been proposed to measure substructures in networks, ideas like modularity, cliques, cycles and reachability spaces have been tailored by graph theorists and computer scientists to search through large data structures and evince connected components in efficient ways.

Differential equations

The state and gain evolutions are governed by a system of coupled differential equations. The general form being:

Differential equations

The state and gain evolutions are governed by a system of coupled differential equations. The general form being:

$$\dot{\mathbf{s}}_i = \underbrace{\mathbf{f}(\mathbf{s}_i)}_{\text{independent kinematics}} + \underbrace{\sum_{j \neq i} \zeta(\sigma_{i,j}, \mathbf{s}_i, \mathbf{s}_j, \Omega_i)}_{\text{local influence}} + \underbrace{\eta(\mathbf{s}_i, \mathbf{s}_j)}_{\text{global influence}} \quad (1)$$

Differential equations

The state and gain evolutions are governed by a system of coupled differential equations. The general form being:

$$\dot{\mathbf{s}}_i = \underbrace{\mathbf{f}(\mathbf{s}_i)}_{\text{independent kinematics}} + \underbrace{\sum_{j \neq i} \zeta(\sigma_{i,j}, \mathbf{s}_i, \mathbf{s}_j, \Omega_i)}_{\text{local influence}} + \underbrace{\eta(\mathbf{s}_i, \mathbf{s}_j)}_{\text{global influence}} \quad (1)$$

$$\dot{\sigma}_{i,j} = \xi(\mathbf{s}_i, \mathbf{s}_j, \Omega_i) \quad (2)$$

where Ω_i is the local neighbourhood of agent i containing n members and ξ is some function of the respective states.

Gain based models

We aim to tailor equations (1) and (2) to effect flocking in a multi agent model.

Gain based models

We aim to tailor equations (1) and (2) to effect flocking in a multi agent model. We define a target function to be used in the state kinematics as follows

$$\Delta_{i,j} = \mathbf{s}_i - \mathbf{s}_j = \begin{pmatrix} x_i - x_j \\ y_i - y_j \end{pmatrix}$$

Gain based models

We aim to tailor equations (1) and (2) to effect flocking in a multi agent model. We define a target function to be used in the state kinematics as follows

$$\Delta_{i,j} = \mathbf{s}_i - \mathbf{s}_j = \begin{pmatrix} x_i - x_j \\ y_i - y_j \end{pmatrix}$$

Hereafter we shall define the norm $\|\cdot\|$ as the square of the euclidean. To be explicit

$$\|\Delta_{i,j}\| = (x_i - x_j)^2 + (y_i - y_j)^2$$

$$\psi_{i,j} = \|\Delta_{i,j}\| - d^2$$

Gain based models

We aim to tailor equations (1) and (2) to effect flocking in a multi agent model. We define a target function to be used in the state kinematics as follows

$$\Delta_{i,j} = \mathbf{s}_i - \mathbf{s}_j = \begin{pmatrix} x_i - x_j \\ y_i - y_j \end{pmatrix}$$

Hereafter we shall define the norm $\| \cdot \|$ as the square of the euclidean. To be explicit

$$\|\Delta_{i,j}\| = (x_i - x_j)^2 + (y_i - y_j)^2$$

$$\psi_{i,j} = \|\Delta_{i,j}\| - d^2$$

Particular form

The meso-attraction/micro-repulsion for the state kinematics is included via the following switch function

$$z_{i,j} = \begin{cases} \sigma_{i,j} & \text{if } \psi_{i,j} \geq 0, \\ b & \text{otherwise.} \end{cases}$$

For a positive *boost* constant b .

Particular form

The meso-attraction/micro-repulsion for the state kinematics is included via the following switch function

$$z_{i,j} = \begin{cases} \sigma_{i,j} & \text{if } \psi_{i,j} \geq 0, \\ b & \text{otherwise.} \end{cases}$$

For a positive *boost* constant b .

Now neglecting the independent kinematics of each agent $\mathbf{f}(\mathbf{s}_i) = 0$, further ignoring the global influence $\eta(\mathbf{s}_i, \mathbf{s}_j) = 0$ and setting the local influence $\zeta(\sigma_{i,j}, \mathbf{s}_i, \mathbf{s}_j) = z_{i,j}\psi_{i,j}\Theta_{i,j}$ the state kinematics generalised by equation (1) reduces to

$$\dot{\mathbf{s}}_i = \sum_{j \neq i} z_{i,j}\psi_{i,j}\Theta_{i,j} \quad (3)$$

Gain evolutions

The gain evolutions suggested by equation (2) are constructed by choosing a gain threshold switch τ and incorporating a growth factor α and a decay factor β should the corresponding states lie within or without the local group of n .

Gain evolutions

The gain evolutions suggested by equation (2) are constructed by choosing a gain threshold switch τ and incorporating a growth factor α and a decay factor β should the corresponding states lie within or without the local group of n . For simplicity (and to reduce the possibility of chattering in the gain evolutions) the gains will not be driven by an explicit state dependence. Hence our gains will evolve according to

$$\dot{\sigma}_{i,j} = g_{i,j} \quad (4)$$

where


$$g_{i,j} = \begin{cases} \alpha & \text{if } \|\Delta_{i,j}\| \in \Omega_i, \sigma_{i,j} < \tau \\ -\beta & \text{if } \|\Delta_{i,j}\| \notin \Omega_i, \sigma_{i,j} > 0 \\ 0 & \text{otherwise.} \end{cases}$$

Networks

We shall couch our discussion in the language of *complex network theory*. A *network* is a weighted graph, that is, a set of elements called *nodes* or *vertices*, which may be connected to one another via relational links (*edges*). To each node we assign a *state* and to each edge a weight (or *gain*), σ_{ij} .


Networks

We shall couch our discussion in the language of *complex network theory*. A *network* is a weighted graph, that is, a set of elements called *nodes* or *vertices*, which may be connected to one another via relational links (*edges*). To each node we assign a *state* and to each edge a weight (or *gain*), $\sigma_{i,j}$.

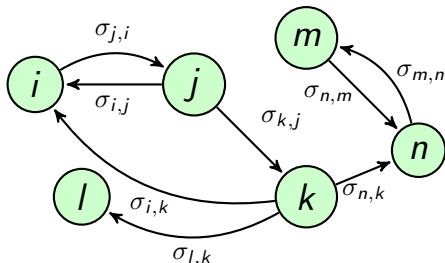

Networks

We shall couch our discussion in the language of *complex network theory*. A *network* is a weighted graph, that is, a set of elements called *nodes* or *vertices*, which may be connected to one another via relational links (*edges*). To each node we assign a *state* and to each edge a weight (or *gain*), $\sigma_{i,j}$.

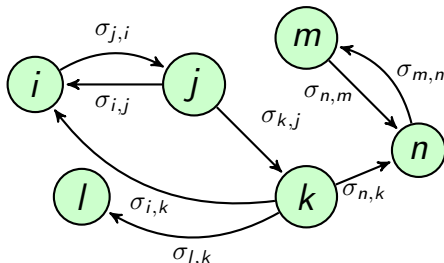

We want our states and gains to evolve until some “configuration” or consensus is achieved.

Adjacency matrices

We shall manipulate the adjacency matrix to glean information about connected components in our spatial networks. Connected nodes represent agents in close proximity whereas disconnected nodes represent agents farther apart than our flocking target distance.

Adjacency matrices

We shall manipulate the adjacency matrix to glean information about connected components in our spatial networks. Connected nodes represent agents in close proximity whereas disconnected nodes represent agents farther apart than our flocking target distance.

Consider a finite symmetric graph $G(V,E)$ with n vertices $v_i \in V$ and c edges $e_{i,j} \in E$. The adjacency matrix A describes the $2c$ arcs (or c edges). Where

$$A \ni a_{i,j}, \quad a_{i,j} = \begin{cases} 0 & \text{if } i = j, \\ 1 & \text{if } e_{i,j} \in E \\ 0 & \text{otherwise.} \end{cases}$$

Adjacency matrices

We shall manipulate the adjacency matrix to glean information about connected components in our spatial networks. Connected nodes represent agents in close proximity whereas disconnected nodes represent agents farther apart than our flocking target distance.

Consider a finite symmetric graph $G(V,E)$ with n vertices $v_i \in V$ and c edges $e_{i,j} \in E$. The adjacency matrix A describes the $2c$ arcs (or c edges). Where

$$A \ni a_{i,j}, \quad a_{i,j} = \begin{cases} 0 & \text{if } i = j, \\ 1 & \text{if } e_{i,j} \in E \\ 0 & \text{otherwise.} \end{cases}$$

Reflexive adjacency

Let $S \ni s_{i,j}$ be $A + 2I_n$, the reflexive adjacency containing *self loops* on each node, hence

$$s_{i,j} = \begin{cases} 2 & \text{if } i = j, \\ 1 & \text{if } e_{i,j} \in E \\ 0 & \text{otherwise.} \end{cases}$$

Reflexive adjacency

Let $S \ni s_{i,j}$ be $A + 2I_n$, the reflexive adjacency containing *self loops* on each node, hence

$$s_{i,j} = \begin{cases} 2 & \text{if } i = j, \\ 1 & \text{if } e_{i,j} \in E \\ 0 & \text{otherwise.} \end{cases}$$

Now S^c catalogues the number of distinct walks of length c from each node v_i to v_j , $\forall v_i, v_j \in V$. It follows that for a given row k in S^c , if column l is non-zero then $e_{k,l} \in E$, otherwise v_k and v_l belong to different components.

References

- “Flocks, Herds, and Schools: A Distributed Behavioral Model, in Computer Graphics”, C.W. Reynolds, 21(4) (SIGGRAPH '87 Conference Proceedings) pp. 25-34 (1987).
- “Pattern formation and functionality in swarm models”, E.M. Rauch, M.M. Millonas and D.R. Chialvo, Physics Letters A 207, pp. 185-193 (1995).
- “Interaction ruling animal collective behavior depends on topological rather than metric distance: Evidence from a field study”, M. Ballerini, N. Cabibbo, R. Candelier, A. Cavagna, E. Cisbani, I. Giardina, V. Lecomte, A. Orlandi, G. Parisi, A. Procaccini, M. Viale and V. Zdravkovic, PNAS vol. 105 no. 4, pp. 1232-1237 (2008).
- “New tools for characterizing swarming systems: A comparison of minimal models”, C. Huepe and M. Aldana, Physica A 387, pp. 2809-2822 (2008).